

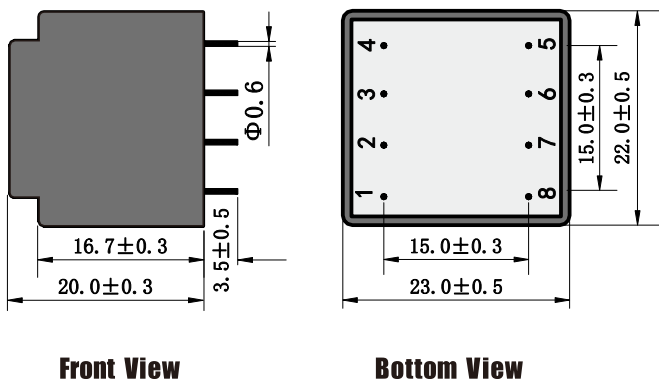
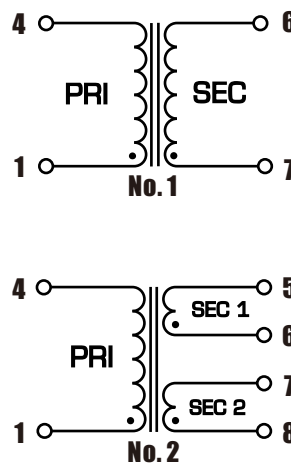
Power: 0.5VA
Core: EE20/10.5
ta 70°C
Weight: 35g
Features

- **Input 230V 50/60Hz**
- **Safety Isolating transformer**
- **Inherently Short-circuit Proof**
- **130°C Class B Insulation**
- **Two Chambers Winding Design**
- **Dielectric Strength 4,500Vrms**
- **UL 94V0 Material**
- **Vacuum Potting**
- **Customer Design**
- **OEM & Subcontracting**

Part Number	Primary (V)	Secondary (V)	Secondary (mA)	No-Load Voltage (V)	Schematic No.
YZ20S50-0407B	230	4	125.0	6.7	1
YZ20S50-0607B	230	6	83.3	10.0	1
YZ20S50-0907B	230	9	55.6	15.0	1
YZ20S50-1207B	230	12	41.7	20.0	1
YZ20S50-1507B	230	15	33.3	25.5	1
YZ20S50-1807B	230	18	27.8	31.0	1
YZ20S50-2407B	230	24	20.8	41.0	1
YZ20D50-0607B	230	2x6	2x41.7	2x10.0	2
YZ20D50-0907B	230	2x9	2x27.8	2x15.5	2
YZ20D50-1207B	230	2x12	2x20.9	2x20.5	2
YZ20D50-1507B	230	2x15	2x16.7	2x25.5	2
YZ20D50-1807B	230	2x18	2x13.9	2x31.0	2
YZ20D50-2407B	230	2x24	2x10.4	2x41.0	2

Packing Information

Model	EE20/10.5 Series
Carton size LxWxH (mm)	565X195X140
QTY Pcs/carton	360
Weight per carton	14.1kg


Dimensions (in mm)

Schematics & Pin Connections

Safety Standard
