

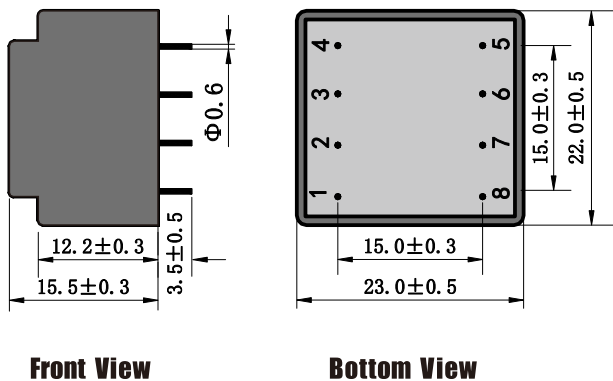
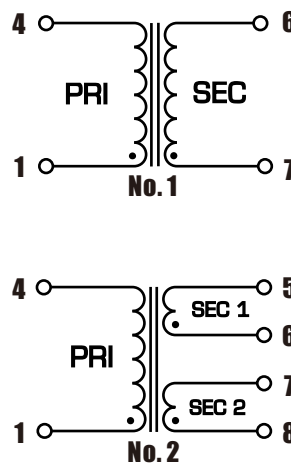
Power: 0.35VA
Core: EE20/6
ta 70°C
Weight: 25g
Features

- **Input 230V 50/60Hz**
- **Safety Isolating transformer**
- **Inherently Short-circuit Proof**
- **130°C Class B Insulation**
- **Two Chambers Winding Design**
- **Dielectric Strength 4,500Vrms**
- **UL 94V0 Material**
- **Vacuum Potting**
- **Customer Design**
- **OEM & Subcontracting**

Part Number	Primary (V)	Secondary (V)	Secondary (mA)	No-Load Voltage (V)	Schematic No.
YZ20S35-0407B	230	4	87.5	6.8	1
YZ20S35-0607B	230	6	58.3	10.0	1
YZ20S35-0907B	230	9	38.9	14.5	1
YZ20S35-1207B	230	12	29.2	19.5	1
YZ20S35-1507B	230	15	23.3	24.8	1
YZ20S35-1807B	230	18	19.4	30.0	1
YZ20S35-2407B	230	24	14.6	39.8	1
YZ20D35-0607B	230	2x6	2x29.2	2x10.0	2
YZ20D35-0907B	230	2x9	2x19.5	2x14.5	2
YZ20D35-1207B	230	2x12	2x14.6	2x19.5	2
YZ20D35-1507B	230	2x15	2x11.7	2x24.8	2
YZ20D35-1807B	230	2x18	2x9.7	2x30.0	2
YZ20D35-2407B	230	2x24	2x7.3	2x39.8	2

Packing Information

Model	EE20/6 Series
Carton size LxWxH (mm)	565X195X140
QTY Pcs/carton	480
Weight per carton	14.3kg


Dimensions (in mm)

Schematics & Pin Connections

Safety Standard
